

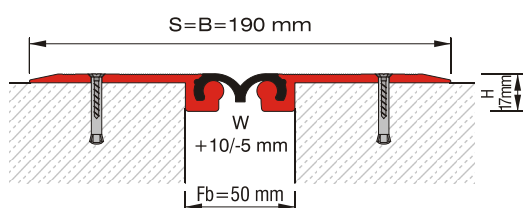



**425/NALR-100**  
**H:25 mm**

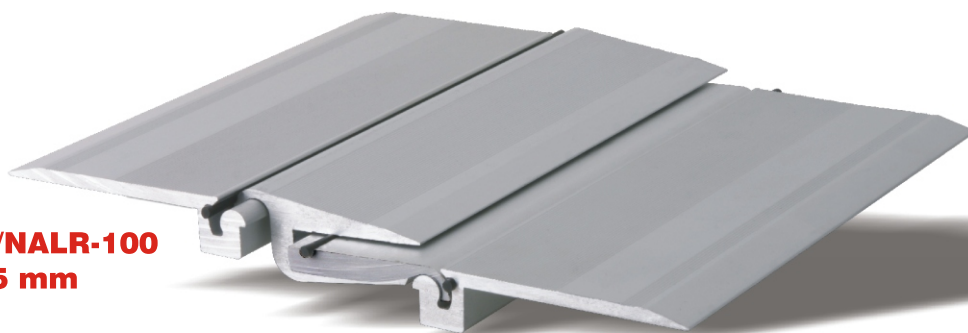


**425/NG-050**  
**H:17 mm**

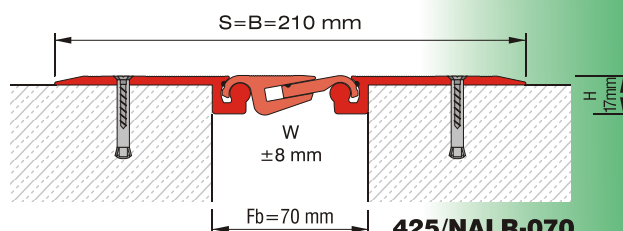


**425/NALR-070**  
**H:17 mm**

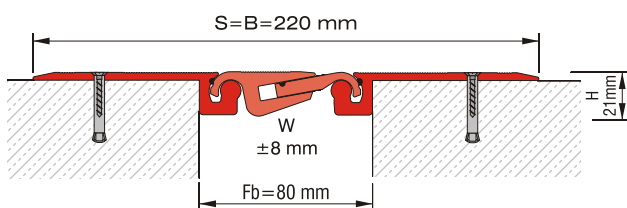


**425/NALR-080**  
**H:21 mm**

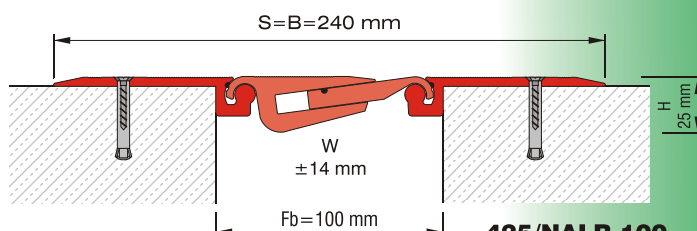

**425/NALR-100**  
**H:25 mm**

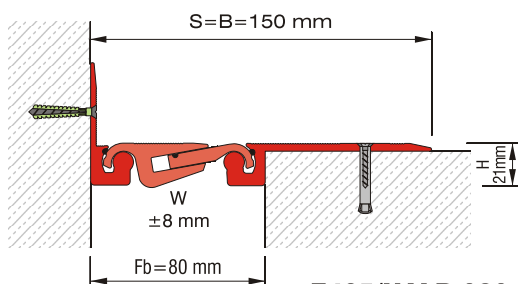

**E425/NALR-080**  
**H:21 mm**

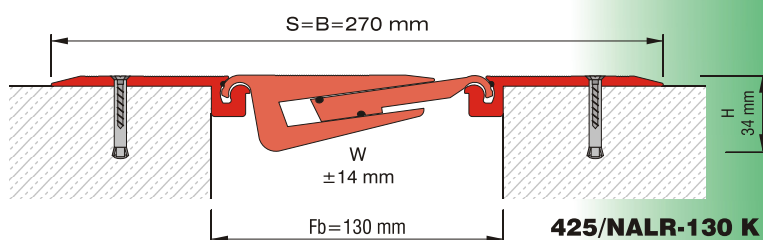

**425/NALR-130 K**  
**H:34 mm**

Номер на профила Profile Number	425/NG-050 E425/NG-050	425/NALR-070 E425/NALR-070	425/NALR-080 E425/NALR-080	425/NALR-100 E425/NALR-100	425/NALR-130 K E425/NALR-130 K
Fb (mm)	50	70	80	100	130
H (mm)    приблизит. approx.	17	17	21	25	34
B (mm)    приблизит. approx.	190/120	210/140	220/150	240/170	270/200
S (mm)    приблизит. approx.	190/120	210/140	220/150	240/170	270/200
W± (mm)    приблизит. approx.	+10/-5	±8	±8	±14	±14
Цвят Color	Алуминий: Натурален, Вложки: Черен, сив, други Aluminium: Natural, Inserts: Black, grey, others				
Материал Material	Алуминий, EPDM каучук (черна), Термопластичен каучук (сив и други) Aluminium, EPDM Rubber (black), Thermoplastic Rubber (grey and others)				
Стандартна дължина (м) Standard Length (m)	4				
Капацитет на товароносимост Load-bearing Capacity	35 kN  90kN	35 kN  90kN	35 kN  90kN	15 kN  60kN	